


# A System Integration Solution

**Introducing** a new version of our ever-popular **Surface Mount Chase (SMC)** product line, the **MPS-SMC-16MU-SD**. This 16MU (14" long) **Swing Down** version provides access to the rear of the **MPS** connector panels to ease termination, cable management and future maintenance. It is also possible to join several of this chases together to create a 32MU, 48MU or even longer **Modular Surface Mount Chase** enclosure, all




with **Swing Down** access, to better serve your system needs. To make this **Surface Mount Chase** system even better, we added **Knockouts** in 2 surfaces. In the back is a knockout for a

6-Gang electrical junction box and in the bottom we added 6 knockouts for 1" conduit to make installation and connection to the enclosure(s) easier and quicker for you.

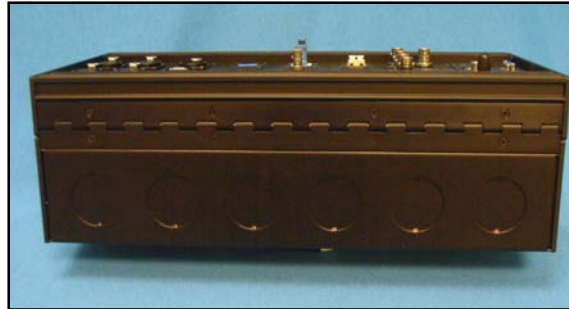

Access to the inside of the chase is simply done by removing the 2 Knurled Thumb Screws, one located at each end of the chase, and **Swinging Down** the front frame assembly.

Standard, the front frame opens 90 degree, but this can be changed to 180 degree by removing and inverting the hinge.

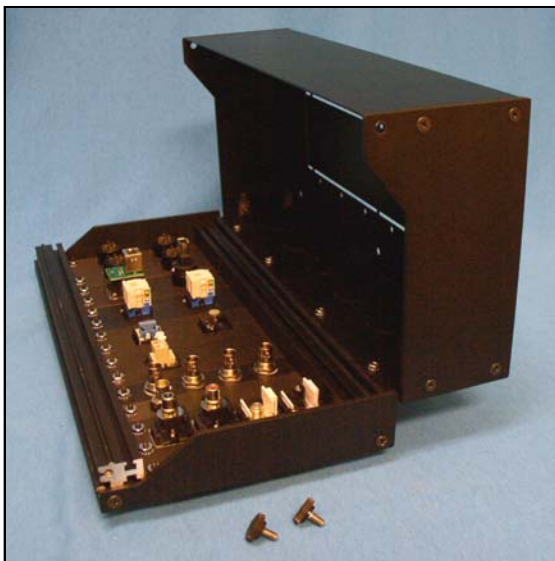

As with all **Surface Mount Chases** this assembly is supplied complete with a set of label strips (2), designed to snap on to the supplied plastic retainer clips and hide the **MPS** connector panels mounting screws, thereby presenting a professional look and finish for your customer and your installation.

Like all **Surface Mount Chases** this assembly is 7.00"(H) & 4.50"(D) with the length determined by the number of MU's, (1MU = 0.875")